



BUILDING THE FUTURE



XSAW 1000

Tractor



XSAW 1000

Automation



TECHNICAL SPECIFICATIONS

Input Voltage
Mains Voltage Tolerance
Minimum Welding Current
Maximum Welding Current
MIG Duty Cycle, 40°C
TIG Duty Cycle, 40°C
MMA Duty Cycle, 40°C
Open – Circuit Voltage
Factory Delivered Roller
Weight
Standard Accessories

Dimensions (W, L, H)
Certification

400 V
- 10 % / + 15 %
10 A
1000 A
1000 A %100
1000 A %100
1000 A %100
63-82 V
3.0 - 3.4 mm / Steel
132 kg
5 m Power Cable (4 x 10 mm²)
5 m Ground Clamp (2 x 70 mm²)
Hose Package (15m)
175mm x 310mm x 493mm
CE

400 V
- 10 % / + 15 %
10 A
1000 A
1000 A %100
1000 A %100
1000 A %100
63-82 V
3.0 - 3.4 mm / Steel
102 kg
5 m Power Cable (4 x 10 mm²)
5 m Ground Clamp (2 x 70 mm²)
Hose Package (15m)
175mm x 310mm x 493mm
CE

IP23


Modular Design




Hot Start



**Intelligent
Cooling**

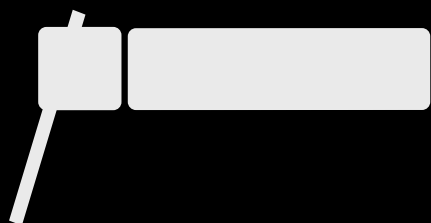

**MMA
Gouging**



ArcForce



**Military
Connector**

