MIG/MAG torch PRO240w PLUS

MIG/MAG, GMAW, 131,135

Technical data according to IEC60974-7




- Liquid cooling
- 300A with CO2 -100%
- 250A with mix M21 (ISO14175) -100%
- diameter of wire 1.0-1.2 mm
- Recommeded gas flow 8-16 l/min

With pulsed arc the intensity is reduced by 35%


Medium power torch for production work of moderate intensity, the Liquid cooling allows for long work cycles.

Standard configuration measures.

A

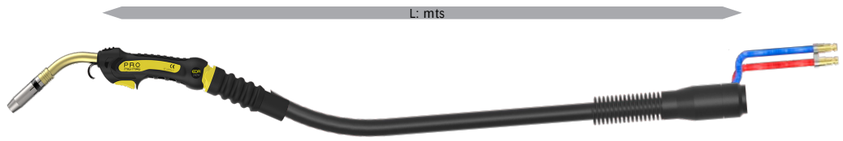

Pos.	CODE	TYPE	Min. Q.
A	M20.2000	Torch PRO240w PLUS-2mts euro connector (alum guide)	1
	M20.3000	Torch PRO240w PLUS-3mts euro connector	1
	M20.4000	Torch PRO240w PLUS-4mts euro connector	1
	M20.5000	Torch PRO240w PLUS-5mts euro connector	1
	M20.6000	Torch PRO240w PLUS-6mts euro connector	1

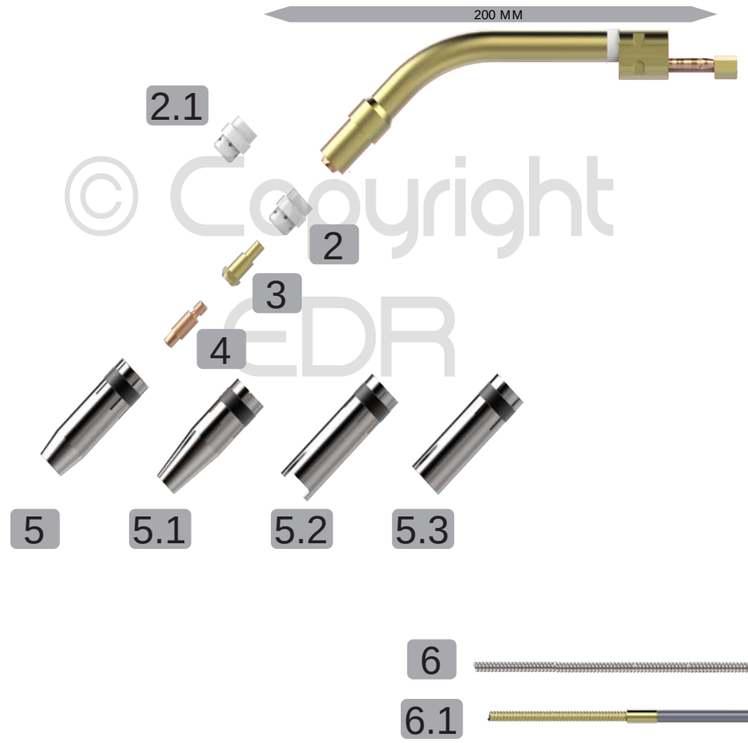

© Copyright EDR

Pos.	CODE	TYPE	Min. Q.
1	M20.0001	Neck PRO240w	1
2	M24.0002	Diffuser PRO24-240w	10
2.1	M24.0012	Diffuser ceramic PRO24-240w	10
3	M24.0003	Tip holder PRO24-240w	5
4	M06.0408	Contact tip M6x28 0.8mm	25
	M06.0410	Contact tip M6x28 1.0mm	25
	M06.0412	Contact tip M6x28 1.2mm	25
	M06.1408	Contact tip M6x28 0.8mm CuCrZr	25
	M06.1410	Contact tip M6x28 1.0mm CuCrZr	25
	M06.1412	Contact tip M6x28 1.2mm CuCrZr	25
5	M24.0501	Nozzle 24-240w L63xØ20xØ12.5mm HD (2mm)	5
5.1	M24.0502	Nozzle 24-240w L63xØ20xØ10mm HD (2mm)	5
5.2	M24.0503	Nozzle 24-240w L68xØ20xØ17mm	5
5.3	M24.0504	Nozzle 24-240w L63xØ20xØ17mm HD (2mm)	5
6	M45SR03	Guide nude L3600xØ4.6xØ2.2mm (1.2-1.6mm) HD	1
	M45SR04	Guide nude L4600xØ4.6xØ2.2mm (1.2-1.6mm) HD	1
	M45SR05	Guide nude L5600xØ4.6xØ2.2mm (1.2-1.6mm) HD	1
6.1	M99SA102	Guide for Alum L2700xØ4.5xØ2.5mm (1.2-1.6mm)	1
	M99SA103	Guide for Alum L3700xØ4.5xØ2.5mm (1.2-1.6mm)	1
	M99SA104	Guide for Alum L4700xØ4.5xØ2.5mm (1.2-1.6mm)	1