

Advantages of using gas shield lens for TIG

Gas Lens welding is often used to improve welding on materials more sensitive to oxygen. This system provides many advantages in standard materials that exceed the small increase in cost of the replacement.



Gas Lens refills require less gas flow to achieve good protection, saving up to 30% gas.



It also allows the electrode to be extended a little more towards the outside, this improves accessibility, ease of work and viewing of the cord.



Another advantage is the possibility of making wider seams by allowing us greater freedom of movement without the electrode coming out of the protection.

Advantages of using PYREX nozzles for TIG

Transparent or glass (PYREX) nozzles have advantages compared to the standard ones, they allow better vision in narrow areas, it improves the activation of the spot welding mask, it does not detect the arc hidden by the nozzle, and its diffusion of gas lens improves the quality of the cord.



Improve flow and save 40% gas




Better protection of the tungsten, and greater extension outside the nozzle



Improve welding helmet activation with less current

Spare parts PYREX

PYREX STUBBY TIG SR17-16-18W

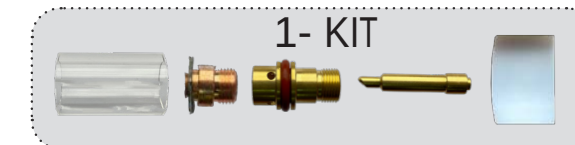


Pos.	CODE	TYPE	Min. Q.
1	T4C10KIT	KIT REPUESTO STUBBY (PYREX) 1.0 mm - SR17/26/18W	1
	T4C16KIT	KIT REPUESTO STUBBY (PYREX) 1.6 mm - SR17/26/18W	1
	T4C24KIT	KIT REPUESTO STUBBY (PYREX) 2.4 mm - SR17/26/18W	1
	T4C32KIT	KIT REPUESTO STUBBY (PYREX) 3.2 mm - SR17/26/18W	1
	T4C40KIT	KIT REPUESTO STUBBY (PYREX) 4.0 mm - SR17/26/18W	1



ELECTRODE HOLDERS PYREX					
1.0mm	1.6mm	2.4mm	3.2mm	4.0mm	
T4C10GS	T4C16GS	T4C24GS	T4C32GS	T4C40GS	
NOZZLE HOLDER STUBBY					
T4CBGS					
DIFFUSER PYREX STUBBY					
1.0mm	1.6mm	2.4mm	3.2mm	4.0mm	
TAS10GS	TAS16GS	TAS24GS	TAS32GS	TAS40GS	
NOZZEL PYREX STUBBY					
T2P8GS					
PROTECTION NOZZEL					
T3HSGS					

KIT PYREX JUMBO SR17-16-18W

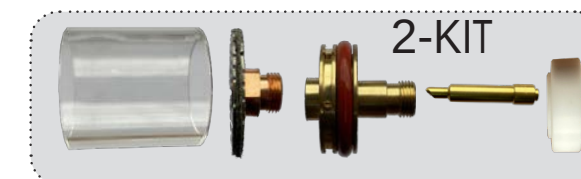

Pos.	CODE	TYPE	Min. Q.
2	T4C16KITJ	KIT REPUESTO JUMBO (PYREX) 1.6 mm - SR17/26/18W	1
	T4C24KITJ	KIT REPUESTO JUMBO (PYREX) 2.4 mm - SR17/26/18W	1
	T4C32KITJ	KIT REPUESTO JUMBO (PYREX) 3.2 mm - SR17/26/18W	1



ELECTRODE HOLDERS PYREX					
	1.6mm	2.4mm	3.2mm		
	T4C16GS	T4C24GS	T4C32GS		
NOZZLE HOLDER JUMBO					
T4CBGJ					
DIFFUSER JUMBO					
	1.6mm	2.4mm	3.2mm		
	TAS16GJ	TAS24GJ	TAS32GJ		
NOZZLE PYREX JUMBO					
T2P8GJ					
PROTECTION NOZZLE JUMBO					
T3HSGJ					