

KOLARC

BUILDING THE FUTURE



Robotic Interfaces

Ethernet

Others



TX400 W



TX270



TECHNICAL SPECIFICATIONS

- Input Voltage
- Mains Voltage Tolerance
- Minimum Welding Current
- Maximum Welding Current
- TIG Duty Cycle, 40°C
- MMA Duty Cycle, 40°C
- Open – Circuit Voltage
- Weight
- Standard Accessories
- Dimensions (L, B, H)
- Certification


- 400 V
- 10 % / + 15 %
- 10 A
- 400 A
- 400 A %40, 360 A %60, 320A %100
- 400 A %40, 360 A %60, 320A %100
- 58 V - 75 V
- Liquid Cooled, 65 kg
- 5 m Power Cable (4 x 4 mm²)
- 5 m Earth Clamp (50 mm²)
- Gas Hose (1.5 m)
- 532mm x 860mm x 974mm
- CE

- 400 V
- 10 % / + 15 %
- 10 A
- 270 A
- 270 A %40, 230 A %60, 200 A %100
- 270 A %40, 230 A %60, 200 A %100
- 58 V - 75 V
- Air Cooled, 12 kg
- 5 m Power Cable (4 x 2.5 mm²)
- 5 m Earth Clamp (35 mm²)
- Gas Hose (1.5 m)
- 175mm x 310mm x 493mm
- CE


TX220




230 V
 - 10 % / + 15 %
 10 A
 220 A
 220 A %13, 90 A %100
 220 A %13, 90 A %100
 58 V - 75 V
 Air Cooled, 12 kg
 5 m Power Cable (3 x 2.5 mm²)
 5 m Earth Clamp (35 mm²)
 Gas Hose (1.5 m)
 175mm x 310mm x 493mm
 CE

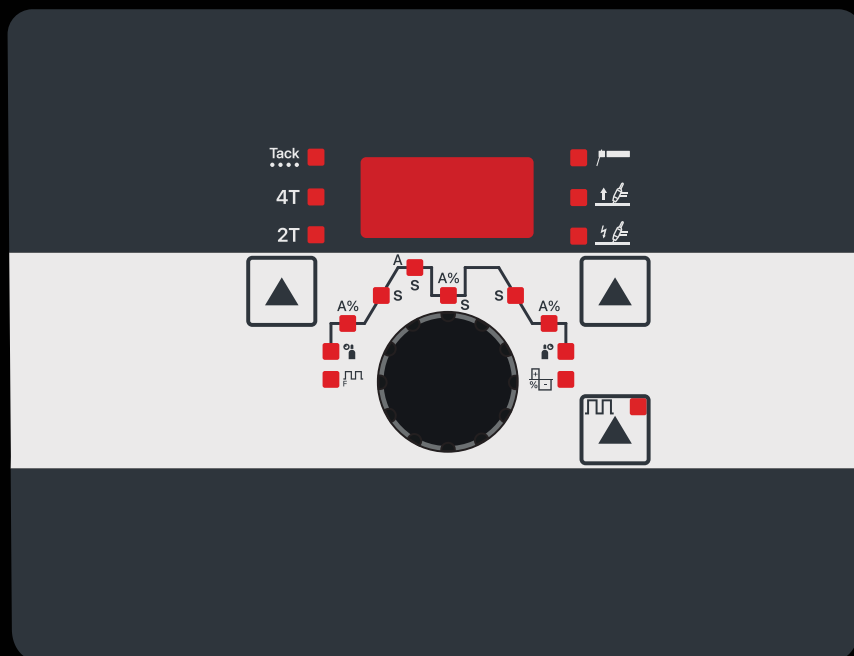


TX400

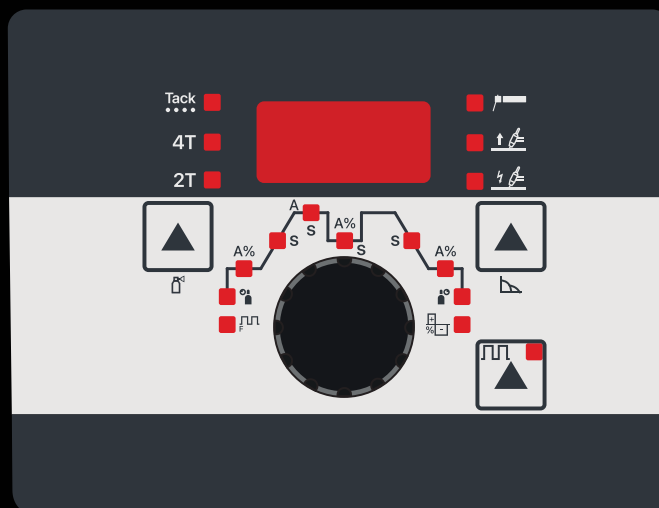


TX270-220



ArcForce

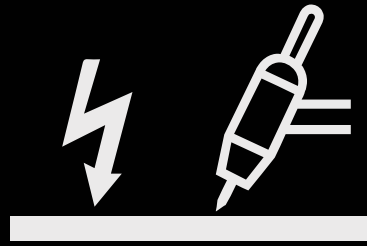

HF

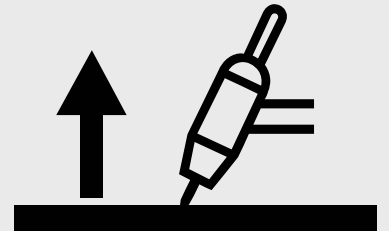

Lift TIG

4T / 2T

Tack
● ● ● ●

HS
Hot Start

F
Pulse

S
Pulse

IP23
Modular Design