# TIG torch SR17

## TIG, GTAW, 141

Technical data according to IEC60974-7





- Gas cooling
- 140 A CD for cycle 60%
- 100 A CA for cycle 60%
- Diameter of the electrode1.0-2.4 mm
- Recommended gas flow 4-12 l/min

TIG system torch for most applications of low intensity, light and manageable re-commended for small repairs and short series productions, universal spare system with threaded nozzle slightly larger than the SR-9 model.




Standard configuration measures

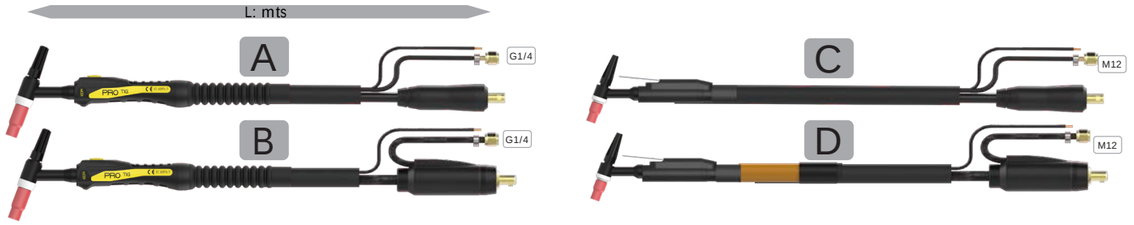


| Pos. | CODE | TYPE | Min. Q. |
|---|---|---|---|
| A | T17.4000 | Torch PRO SR17-4mts connector 35/50 | 1 |
| | T17.8000 | Torch PRO SR17-8mts connector 35/50 | 1 |
| | T17.4001 | Torch PRO SR17Flex-4mts connector 35/50 | 1 |
| | T17.8001 | Torch PRO SR17Flex-8mts connector 35/50 | 1 |
| B | T17.4010 | Torch coaxial PRO SR17-4mts connector 35/50 | 1 |
| | T17.8010 | Torch coaxial PRO SR17-8mts connector 35/50 | 1 |
| | T17.4011 | Torch coaxial PRO SR17Flex-4mts connector 35/50 | 1 |
| | T17.8011 | Torch coaxial PRO SR17Flex-8mts connector 35/50 | 1 |
| | T17.4020 | Torch coaxial PRO SR17-4mts connector 35/50 leather | 1 |
| | T17.8020 | Torch coaxial PRO SR17-8mts connector 35/50 leather | 1 |
| | T17.4030 | Torch coaxial TIG PRO SR17-4mts connector-EURO | 1 |
| | T17.8030 | Torch coaxial TIG PRO SR17-8mts connector-EURO | 1 |
| C | T17.4000 LE | Torch TIG LEVER SR17-4mts connector 35/50 | 1 |
| | T17.8000 LE | Torch TIG LEVER SR17-8mts connector 35/50 | 1 |
| D | T17.4020 LE | Torch coaxial TIG LEVER SR17-4mts connector 35/50 leather | 1 |
| | T17.8020 LE | Torch coaxial TIG LEVER SR17-8mts connector 35/50 leather | 1 |








© Copyright EDR

| Pos. | CODE | TYPE | Min. Q. |
|---|---|---|---|
| 1 | T17.0001 | Head SR17 | 1 |
| 1.1 | T17.0011 | Head FLEX SR17F | 1 |
| 2 | T57Y02 | Long cap SR17-18-26 | 5 |
| 2.1 | T57Y0MED | Medium cap SR17-18-26 | 5 |
| 2.2 | T57Y04 | Short cap SR17-18-26 | 5 |
| 3 | T10N22 | Collet SR17-18-26 1.0mm | 5 |
| | T10N23 | Collet SR17-18-26 1.6mm | 5 |
| | T10N23M | Collet SR17-18-26 2.0mm | 5 |
| | T10N24 | Collet SR17-18-26 2.4mm | 5 |
| | T10N25 | Collet SR17-18-26 3.2mm | 5 |
| | T10N26 | Collet SR17-18-26 4.0mm | 5 |
| 4 | T18CG | Insulating SR17-18-26 | 5 |
| 5 | T10N30 | Diffuser SR17-18-26 1.0mm | 5 |
| | T10N31 | Diffuser SR17-18-26 1.6mm | 5 |
| | T10N31M | Diffuser SR17-18-26 2.0mm | 5 |
| | T10N32 | Diffuser SR17-18-26 2.4mm | 5 |
| | T10N33 | Diffuser SR17-18-26 3.2mm | 5 |
| | T10N34 | Diffuser SR17-18-26 4.0mm | 5 |
| 6 | T10N50 | Nozzle SR17-18-26 #4-L47xØ6.3mm | 10 |
| | T10N49 | Nozzle SR17-18-26 #5-L47xØ8mm | 10 |
| | T10N48 | Nozzle SR17-18-26 #6-L47xØ9.5mm | 10 |
| | T10N47 | Nozzle SR17-18-26 #7-L47xØ11mm | 10 |
| | T10N46 | Nozzle SR17-18-26 #8-L47xØ12.5mm | 10 |
| | T10N45 | Nozzle SR17-18-26 #10-L47Xø16mm | 10 |
| | T10N44 | Nozzle SR17-18-26 #12-L47Xø19mm | 10 |
| 6.1 | T10N49L | Nozzle SR17-18-26 #5-L74Xø8mm | 10 |
| | T10N48L | Nozzle SR17-18-26 #6-L74Xø9.5mm | 10 |
| | T10N47L | Nozzle SR17-18-26 #7-L74xØ11mm | 10 |
| 7 | T54N01 | Insulating gas lens SR17-18-26 | 5 |
| 8 | T45V24 | Diffuser gas lens SR17-18-26 1.0mm | 5 |
| | T45V25 | Diffuser gas lens SR17-18-26 1.6mm | 5 |
| | T45V25M | Diffuser gas lens SR17-18-26 2.0mm | 5 |
| | T45V26 | Diffuser gas lens SR17-18-26 2.4mm | 5 |
| | T45V27 | Diffuser gas lens SR17-18-26 3.2mm | 5 |
| | T45V28 | Diffuser gas lens SR17-18-26 4.0mm | 5 |
| 9 | T54N18 | Nozzle SR17-18-26 #4-L42xØ6.3mm | 10 |
| | T54N17 | Nozzle SR17-18-26 #5-L42xØ8mm | 10 |
| | T54N16 | Nozzle SR17-18-26 #6-L42xØ9.5mm | 10 |
| | T54N15 | Nozzle SR17-18-26 #7-L42xØ11mm | 10 |
| | T54N14 | Nozzle SR17-18-26 #8-L42xØ12.5mm | 10 |
| 10 | T54N63 | Insulating gas lens jumbo SR17-18-26 | 5 |
| 11 | T45V0204 | Diffuser gas lens jumbo SR17-18-26 1.0mm | 5 |
| | T45V116 | Diffuser gas lens jumbo SR17-18-26 1.6mm | 5 |
| | T45V64 | Diffuser gas lens jumbo SR17-18-26 2.4mm | 5 |
| | T995795 | Diffuser gas lens jumbo SR17-18-26 3.2mm | 5 |
| | T45V63 | Diffuser gas lens jumbo SR17-18-26 4.0mm | 5 |
| 12 | T57N75 | Nozzle gas lens jumbo SR17-18-26 #6D-L48xØ9.5mm | 10 |
| | T57N74 | Nozzle gas lens jumbo SR17-18-26 #8D-L48xØ12.5mm | 10 |
| | T57N88 | Nozzle gas lens jumbo SR17-18-26 #10D-L48xØ16mm | 10 |
| | T57N87 | Nozzle gas lens jumbo SR17-18-26 #12D-L48xØ19mm | 10 |