TIG torch SR18W

TIG, GTAW, 141

Technical data according to IEC60974-7




- Liquid cooling
- 320 A CD for cycle 60%
- 225 A CA for cycle 60%
- Diameter of the electrode1.0-4.0 mm
- Recommended gas flow 4-12 l/min

TIG system torch for most high intensity applications with liquid cooling, recommended for repairs and production, universal replacement system with threaded nozzle slightly larger than the SR-20 model.



Standard configuration measures.

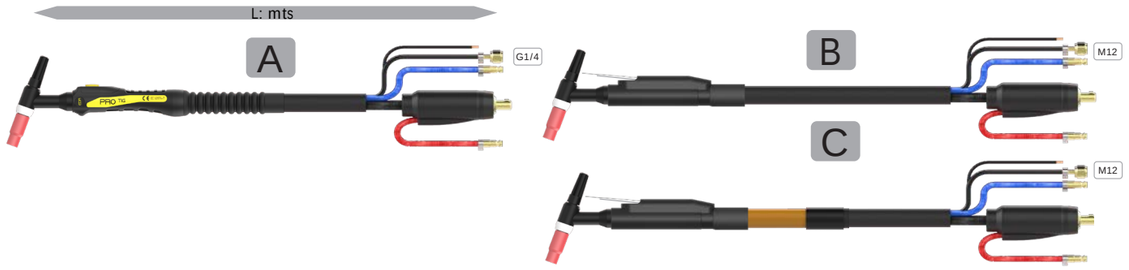

Pos.	CODE	TYPE	Min. Q.
A	T18.4000	Torch TIG PRO SR18W-4mts connector 35/50	1
	T18.8000	Torch TIG PRO SR18W-8mts connector 35/50	1
	T18.4001	Torch TIG PRO SR18WF Flex-4mts connector 35/50	1
	T18.8001	Torch TIG PRO SR18WF Flex-8mts connector 35/50	1
	T18.4030	Torch TIG PRO SR18WF-4mts connector-EURO	1
	T18.8030	Torch TIG PRO SR18WF-8mts connector-EURO	1
	T18.4020	Torch TIG PRO SR18W-4mts connector 35/50 leather	1
	T18.8020	Torch TIG PRO SR18W-8mts connector 35/50 leather	1
B	T18.4000 LE	Torch TIG LEVER SR18W-4mts connector 35/50	1
	T18.8000 LE	Torch TIG LEVER SR18W-8mts connector 35/50	1
C	T18.4020 LE	Torch TIG LEVER SR18W-4mts connector 35/50 leather	1
	T18.8020 LE	Torch TIG LEVER SR18W-8mts connector 35/50 leather	1



Copyright EDR

Pos.	CODE	TYPE	Min. Q.
1	T18.0001	Head SR18W	1
1.1	T18.0011	Head flex SR18WF	1
1.2	T18.0003	Head pencil SR18WP HD (SPECIAL HANDLE)	1
2	T57Y02	Long cap SR17-18-26	5
2.1	T57Y0MED	Medium cap SR17-18-26	5
2.2	T57Y04	Short cap SR17-18-26	5
3	T10N22	Collet SR17-18-26 1.0mm	5
	T10N23	Collet SR17-18-26 1.6mm	5
	T10N23M	Collet SR17-18-26 2.0mm	5
	T10N24	Collet SR17-18-26 2.4mm	5
	T10N25	Collet SR17-18-26 3.2mm	5
	T10N26	Collet SR17-18-26 4.0mm	5
4	T18CG	Insulating SR17-18-26	5
5	T10N30	Diffuser SR17-18-26 1.0mm	5
	T10N31	Diffuser SR17-18-26 1.6mm	5
	T10N31M	Diffuser SR17-18-26 2.0mm	5
	T10N32	Diffuser SR17-18-26 2.4mm	5
	T10N33	Diffuser SR17-18-26 3.2mm	5
	T10N34	Diffuser SR17-18-26 4.0mm	5
6	T10N50	Nozzle SR17-18-26 #4-L47xØ6.3mm	10
	T10N49	Nozzle SR17-18-26 #5-L47xØ8mm	10
	T10N48	Nozzle SR17-18-26 #6-L47xØ9.5mm	10
	T10N47	Nozzle SR17-18-26 #7-L47xØ11mm	10
	T10N46	Nozzle SR17-18-26 #8-L47xØ12.5mm	10
	T10N45	Nozzle SR17-18-26 #10-L47Xø16mm	10
	T10N44	Nozzle SR17-18-26 #12-L47Xø19mm	10
6.1	T10N49L	Nozzle SR17-18-26 #5-L74Xø8mm	10
	T10N48L	Nozzle SR17-18-26 #6-L74Xø9.5mm	10
	T10N47L	Nozzle SR17-18-26 #7-L74xØ11mm	10
7	T54N01	Insulating gas lens SR17-18-26	5
8	T45V24	Diffuser gas lens SR17-18-26 1.0mm	5
	T45V25	Diffuser gas lens SR17-18-26 1.6mm	5
	T45V25M	Diffuser gas lens SR17-18-26 2.0mm	5
	T45V26	Diffuser gas lens SR17-18-26 2.4mm	5
	T45V27	Diffuser gas lens SR17-18-26 3.2mm	5
	T45V28	Diffuser gas lens SR17-18-26 4.0mm	5
9	T54N18	Nozzle SR17-18-26 #4-L42xØ6.3mm	10
	T54N17	Nozzle SR17-18-26 #5-L42xØ8mm	10
	T54N16	Nozzle SR17-18-26 #6-L42xØ9.5mm	10
	T54N15	Nozzle SR17-18-26 #7-L42xØ11mm	10
	T54N14	Nozzle SR17-18-26 #8-L42xØ12.5mm	10
10	T54N63	Insulating gas lens jumbo SR17-18-26	5
11	T45V0204	Diffuser gas lens jumbo SR17-18-26 1.0mm	5
	T45V116	Diffuser gas lens jumbo SR17-18-26 1.6mm	5
	T45V64	Diffuser gas lens jumbo SR17-18-26 2.4mm	5
	T995795	Diffuser gas lens jumbo SR17-18-26 3.2mm	5
	T45V63	Diffuser gas lens jumbo SR17-18-26 4.0mm	5
12	T57N75	Nozzle gas lens jumbo SR17-18-26 #6D-L48xØ9.5mm	10
	T57N74	Nozzle gas lens jumbo SR17-18-26 #8D-L48xØ12.5mm	10
	T57N88	Nozzle gas lens jumbo SR17-18-26 #10D-L48xØ16mm	10
	T57N87	Nozzle gas lens jumbo SR17-18-26 #12D-L48xØ19mm	10