# TIG torch SR26

TIG, GTAW, 141

Technical data according to IEC60974-7





- Gas cooling
- 200 A CD for cycle 60%
- 140 A CA for cycle 60%
- Diameter of the electrode1.0-4.0 mm
- Recommended gas flow 4-12 l/min

TIG system torch for most applications of low intensity, light and manageable recommended for small repairs and short series productions, universal spare system with threaded nozzle slightly larger than the SR-9 model.




Standard configuration measures

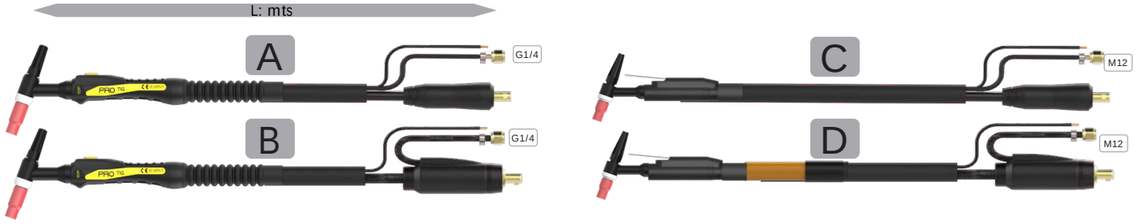


| Pos. | CODE | TYPE | Min. Q. |
|---|---|---|---|
| A | T26.4000 | Torch TIG PRO SR26-4mts connector 35/50 (35mm2) | 1 |
| | T26.8000 | Torch TIG PRO SR26-8mts connector 35/50 (35mm2) | 1 |
| | T26.4001 | Torch TIG PRO SR26Flex-4mts connector 35/50 (35mm2) | 1 |
| | T26.8001 | Torch TIG PRO SR26Flex-8mts connector 35/50 (35mm2) | 1 |
| B | T26.4010 | Torch coaxial TIG PRO SR26-4mts connector 35/50 | 1 |
| | T26.8010 | Torch coaxial TIG PRO SR26-8mts connector 35/50 | 1 |
| | T26.4011 | Torch coaxial TIG PRO SR26Flex-4mts connector 35/50 | 1 |
| | T26.8011 | Torch coaxial TIG PRO SR26Flex-8mts connector 35/50 | 1 |
| | T26.4020 | Torch coaxial TIG PRO SR26-4mts connector 35/50 leather | 1 |
| | T26.8020 | Torch coaxial TIG PRO SR26-8mts connector 35/50 leather | 1 |
| | T26.4030 | Torch coaxial TIG PRO SR26-4mts connector-EURO | 1 |
| | T26.8030 | Torch coaxial TIG PRO SR26-8mts connector-EURO | 1 |
| C | T26.4000 LE | Torch TIG LEVER SR26-4mts connector 35/50 (35mm2) | 1 |
| | T26.8000 LE | Torch TIG LEVER SR26-8mts connector 35/50 (35mm2) | 1 |
| D | T26.4020 LE | Torch coaxial TIG LEVER SR26-4mts connector 35/50 leather | 1 |
| | T26.8020 LE | Torch coaxial TIG LEVER SR26-8mts connector 35/50 leather | 1 |








Copyright EDR

| Pos. | CODE | TYPE | Min. Q. |
|---|---|---|---|
| 1 | T26.0001 | Head SR26 | 1 |
| 1.1 | T26.0011 | Head flex SR26VF | 1 |
| 1.2 | T26.0003 | Head pencil SR26 | 1 |
| 2 | T57Y02 | Long cap SR17-18-26 | 5 |
| 2.1 | T57Y0MED | Medium cap SR17-18-26 | 5 |
| 2.2 | T57Y04 | Short cap SR17-18-26 | 5 |
| 3 | T10N22 | Collet SR17-18-26 1.0mm | 5 |
| | T10N23 | Collet SR17-18-26 1.6mm | 5 |
| | T10N23M | Collet SR17-18-26 2.0mm | 5 |
| | T10N24 | Collet SR17-18-26 2.4mm | 5 |
| | T10N25 | Collet SR17-18-26 3.2mm | 5 |
| | T10N26 | Collet SR17-18-26 4.0mm | 5 |
| 4 | T18CG | Insulating SR17-18-26 | 5 |
| 5 | T10N30 | Diffuser SR17-18-26 1.0mm | 5 |
| | T10N31 | Diffuser SR17-18-26 1.6mm | 5 |
| | T10N31M | Diffuser SR17-18-26 2.0mm | 5 |
| | T10N32 | Diffuser SR17-18-26 2.4mm | 5 |
| | T10N33 | Diffuser SR17-18-26 3.2mm | 5 |
| | T10N34 | Diffuser SR17-18-26 4.0mm | 5 |
| 6 | T10N50 | Nozzle SR17-18-26 #4-L47xØ6.3mm | 10 |
| | T10N49 | Nozzle SR17-18-26 #5-L47xØ8mm | 10 |
| | T10N48 | Nozzle SR17-18-26 #6-L47xØ9.5mm | 10 |
| | T10N47 | Nozzle SR17-18-26 #7-L47xØ11mm | 10 |
| | T10N46 | Nozzle SR17-18-26 #8-L47xØ12.5mm | 10 |
| | T10N45 | Nozzle SR17-18-26 #10-L47Xø16mm | 10 |
| | T10N44 | Nozzle SR17-18-26 #12-L47Xø19mm | 10 |
| 6.1 | T10N49L | Nozzle SR17-18-26 #5-L74Xø8mm | 10 |
| | T10N48L | Nozzle SR17-18-26 #6-L74Xø9.5mm | 10 |
| | T10N47L | Nozzle SR17-18-26 #7-L74xØ11mm | 10 |
| 7 | T54N01 | Insulating gas lens SR17-18-26 | 5 |
| 8 | T45V24 | Diffuser gas lens SR17-18-26 1.0mm | 5 |
| | T45V25 | Diffuser gas lens SR17-18-26 1.6mm | 5 |
| | T45V25M | Diffuser gas lens SR17-18-26 2.0mm | 5 |
| | T45V26 | Diffuser gas lens SR17-18-26 2.4mm | 5 |
| | T45V27 | Diffuser gas lens SR17-18-26 3.2mm | 5 |
| | T45V28 | Diffuser gas lens SR17-18-26 4.0mm | 5 |
| 9 | T54N18 | Nozzle SR17-18-26 #4-L42xØ6.3mm | 10 |
| | T54N17 | Nozzle SR17-18-26 #5-L42xØ8mm | 10 |
| | T54N16 | Nozzle SR17-18-26 #6-L42xØ9.5mm | 10 |
| | T54N15 | Nozzle SR17-18-26 #7-L42xØ11mm | 10 |
| | T54N14 | Nozzle SR17-18-26 #8-L42xØ12.5mm | 10 |
| 10 | T54N63 | Insulating gas lens jumbo SR17-18-26 | 5 |
| 11 | T45V0204 | Diffuser gas lens jumbo SR17-18-26 1.0mm | 5 |
| | T45V116 | Diffuser gas lens jumbo SR17-18-26 1.6mm | 5 |
| | T45V64 | Diffuser gas lens jumbo SR17-18-26 2.4mm | 5 |
| | T995795 | Diffuser gas lens jumbo SR17-18-26 3.2mm | 5 |
| | T45V63 | Diffuser gas lens jumbo SR17-18-26 4.0mm | 5 |
| 12 | T57N75 | Nozzle gas lens jumbo SR17-18-26 #6D-L48xØ9.5mm | 10 |
| | T57N74 | Nozzle gas lens jumbo SR17-18-26 #8D-L48xØ12.5mm | 10 |
| | T57N88 | Nozzle gas lens jumbo SR17-18-26 #10D-L48xØ16mm | 10 |
| | T57N87 | Nozzle gas lens jumbo SR17-18-26 #12D-L48xØ19mm | 10 |